


San Telequip (P) Ltd.,  
504 & 505 Deron Heights, Baner Road  
Pune 411045, India

Phone: +91-20-27293455, 9764027070, 8390069393  
email : [info@santelequip.com](mailto:info@santelequip.com)



Connecting. Converting. Leading !

## 4 ports Isolated Modbus RTU to Modbus TCP Gateway, Model SC10E4I MK

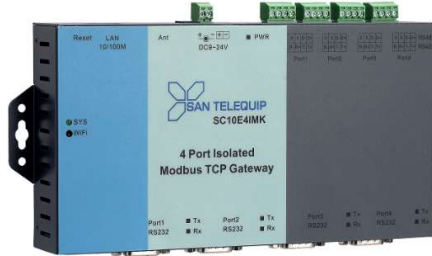

- CPU : MT7688AN MIPS CPU, 580 MHz
- RAM : 128M Bytes DDR2 RAM
- ROM : 32M Bytes Flash ROM
- OS : Open Wrt Linux OS

Support 8 Modbus TCP Master each 32 simultaneous request or 8 TCP Slave on each

RTU port. Modbus TCP Master needed to be assigned different port no's for each Serial port e.g. 502, 503, 504 & 505

### Ethernet

Port Type : RJ-45 Connector

Speed : 10 /100 M bps ( Auto Detecting )

Protocol : ARP, IP, ICMP, TCP, HTTP, DHCP, Modbus RTU, Modbus TCP

Protocol : NTP, FTP

Mode : TCP Server / TCP Client / RTU Master / RTU Slave

Setup : HTTP Browser Setup (IE & Netscape), Console

Security : Setup Password

Protection : Built-in 1.5KV Magnetic Isolation

Modbus TCP Master needed to be assigned different port no's for each Serial port e.g. 502, 503, 504 & 505

### WiFi port

Standard : 802.11b/g/n

Data Rate : 11/54/72.2 Mbps @ 20Mhz Band Width

Modulation : DSSS, OFDM

Frequency : 2.4GHz

Tx Power 11b : Max. 22dBm

Tx Power 11g/n: Max. 19dBm

Rx Sensitivity : -76dBm @ 54Mbps, -89.5dBm @ 11Mbps

Tx Rate : Max. 54Mbps with auto fallback

Tx Distance : Up to 100m

Security : WEP 64-bit / 128-bit data encryption, AES, WPA / WPA2 personal, WPS2.0, WAPI

Antenna : 2 dBi, RP-SMA connector

Network Mode : Infrastructure, Ad-Hoc; Soft AP (for Setup)

Mode : TCP Server / TCP Client / RTU Master / RTU Slave

Setup : HTTP Browser Setup (IE, Chrome, Firefox)

Security : Login Password

Reset Button

San Telequip (P) Ltd.,  
504 & 505 Deron Heights, Baner Road  
Pune 411045, India



Phone: +91-20-27293455, 9764027070, 8390069393    Connecting. Converting. Leading !  
email : [info@santelequip.com](mailto:info@santelequip.com)

---

### Serial Ports \* 4

Port : RS 232/422/485 \* 4 Port, RS232 - RX/TX only  
Speed : 300 bps to 921.6 K bps  
Parity : None, Odd, Even, Mark, Space  
Data Bit : 5, 6, 7, 8  
Stop Bit : 1, 2  
RS-232 Pins : Rx, Tx, GND  
RS-422 : Rx+, Rx-, Tx+, Tx- ( Surge Protect )  
RS-485 : Data+, Data- ( Surge Protect )

### Protection

Port : RS422 / 485 Surge Protected  
15KV ESD for all signals  
3000V DC Isolation

### Power

DC 9~32 V, 300mA@12V. Support Terminal Input & DC Jack

### Other Features

Digital Input / Output : GPIO \* 8 Pins  
Led Lamp : SYS, PWR, WiFi, LAN, RX, TX  
Watch Dog Function

### Mechanical and Environment

Operating Temperature : -20°C to 70°C  
Storage Temperature : -25°C to 80°C  
Dimensions : 195 \* 120 \* 35 mm ( W \* H \* D )  
Weight : 660 gm  
Mounting : Back of Panel / Provision for DIN Rail

### Model Code : SC10E4I MK W

SC10E4I MK : Base Model. 4 Port Isolated RS232/RS485/RS422 to Ethernet  
Converter, supporting Modbus RTU to Modbus TCP Function  
W : With WiFi